

STANDARD SEALED ATR ENCLOSURE

- » Dry air contaminant-free applications
- » CM's entry level, natural air convection solution
- » 5°C less payload ΔT than conventional passive ATRs
- » Supports conduction and air-cooled modules
- » Up to 180 watts chassis power dissipation*
- » Designed for low wattage demands
- » Internal forced-air recirculation
- » Silent, no external fans

**S**

STANDARD SEALED

↑ 180W
PAYLOAD POWER DISSIPATION



SEALED 6U ATR CHASSIS




Sealed 6U ATR - Contaminant-free Enclosure

suitable for applications that demand moderate passive cooling capability at low cost

CM's entry level *Standard Sealed* chassis has been developed to offer customers a compact enclosure solution that leverages on traditional thermodynamic principles: free-air convection, conduction, and radiation. These zero maintenance ATRs incorporate no external fans and are ideal where ambient air is laden with hostile or harmful contaminants.

AVAILABILITY

The 6U CM Standard Sealed series is available in 5, 7, & 12 slot versions, supporting our comprehensive line of 0.8" pitch military VME, cPCI, VPX or Hybrid Backplanes and CM's first generation of military Power Supply Units.

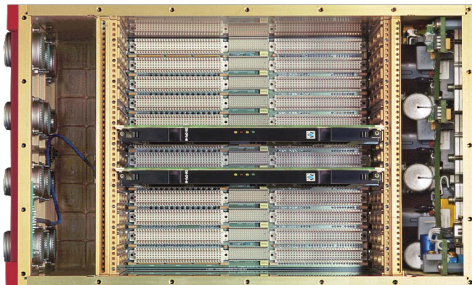

LAYOUT & DESIGN

Internal layout is divided into 3 independent metallic partitions: I/O section at the front, card-cage in the middle, and PSU section at the rear. This increases thermal dissipation and reduces PSU heat and EMI/EMC noise on system electronics.

DISSIPATION & COOLING

Heat generated within the enclosure is primarily dissipated by free-air convection to the surrounding environment. Internal low noise recirculation fans ensure dry air is forced across conduction or air-cooled payload modules, minimizing hot-spots and dissipating heat homogeneously throughout the chassis walls.


RECOMMENDED PAYLOAD POWER RATINGS

(SELF DISSIPATING @ 55°C AMBIENT; NO EXTERNAL AIRFLOW OR COLD PLATE PROVIDED)

CM-ATR-45/S (12 SLOT) ≤ 180 watts

CM-ATR-35/S (7 SLOT) ≤ 130 watts

CM-ATR-25/S (5 SLOT) ≤ 100 watts

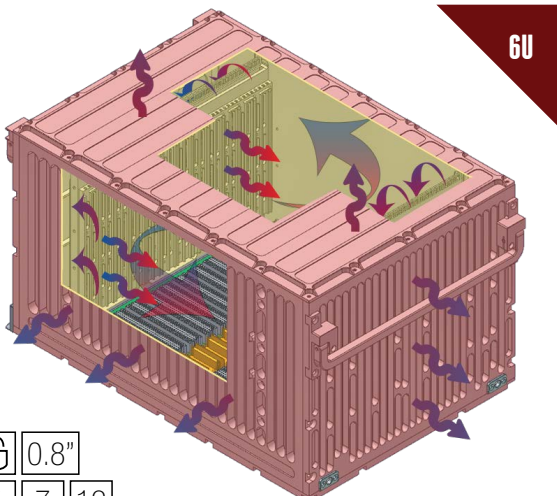

6U

0.8"
5 7 12

MAINTENANCE FREE

LOW COST

LOW WEIGHT



S
STANDARD SEALED



CM MILITARY ATR PRODUCT RANGE

Sealed 6U ATR Series Specifications

for low wattage VME, VPX & cPCI applications with 0.8" pitch eurocards

	CM-ATR-25/S	CM-ATR-35/S	CM-ATR-45/S
SLOTS	5	7	12
WIDTH	130 mm	170 mm	271 mm
HEIGHT	236 mm	236 mm	236 mm
DEPTH	390 mm	390 mm	390 mm
WEIGHT	5.2 Kg	6.6 Kg	10 Kg
CGTR THERMAL RES.	$\Delta T/W = 0.26^{\circ}\text{C}$	$\Delta T/W = 0.23^{\circ}\text{C}$	$\Delta T/W = 0.18^{\circ}\text{C}$
PSU MODEL	A-575W/A-475W	C-625W/C-575W	950W/1050W
PSU POWER	575 watts (28 VDC 475 watts)	625 watts (28 VDC 575 watts)	1050 watts (28 VDC 950 watts)
PSU V-INPUT	28 VDC $\pm 30\%$, 48 VDC $\pm 30\%$, 72 VDC $\pm 30\%$, 270 VDC $\pm 30\%$, Autorange 90-132 VAC RMS & 180-264 VAC RMS @ 47-880 Hz, 3-Phase 200 VAC @ 47-880 Hz $\pm 30\%$		
STD BACKPLANE	VME64X or cPCI or VPX or Hybrid VME64X/VPX 6U 0.8" pitch backplanes		
SLOT/BOARD FORMAT	CCS: Conduction-cooled slots only or MCS: Slot-by-slot user configured card-cage allows intermixing conduction-cooled ANSI-VITA 48.2 & air-cooled ANSI-VITA 48.1 boards		
INTERNAL FAN	27 CFM	54 CFM	108 CFM
FRONT PANEL AREA	101 mm x 172.5 mm	141.5 mm x 172.5 mm	243 mm x 172.5 mm
CM FRONT PANEL I/O	6 Power Pins (23 Amp) & 365 I/O Pins (5 Amp)	6 Power Pins (23 Amp) & 822 I/O Pins (5 Amp)	6 Power Pins (23 Amp) & 1057 I/O Pins (5 Amp)
TEMPERATURE SPECS	-40 °C to +85 °C Operating, -55 °C to 100 °C Storage		
MTBF	25° GB 98,000 Hours 65° AIC 32,000 Hours	25° GB 86,000 Hours 65° AIC 28,000 Hours	25° GB 78,000 Hours 65° AIC 24,000 Hours
MOUNTING TRAY	CM-TR-25/S	CM-TR-35/S	CM-TR-45/S

COMPLEMENTARY INFORMATION

- CM ATR Common Features
- CM ATR Backplanes
- CM ATR Power Supplies

OPTIONAL COLD PLATE MOUNTING

Chassis can be optionally cold plate mounted to increase power dissipation rates by approximately 20%.

STANDARD SEALED ATR ORDERING

For ordering information see page 127 of this catalog.


PART NUMBER EXAMPLE:

CM-ATR-35/S/cPCI/28VDC/400W/3.3-75W/UDP/HTC/HBC/MCS/G

- 7 slot, 6U Avionics Enclosure.
- Sealed Enclosure (Standard).
- 7 slot cPCI Backplane for 6U 0.8" boards fitted with I/O on P3, P4 & P5.
- 28VDC Power Supply Unit with 400W (+5VDC @ 40A, +3.3VDC @ 5A, $\pm 12\text{VDC}$ @ 8A).
- (+) 3.3VDC @ 22A DC/DC converter on Backplane.
- User defined Front Panel layout.
- High profile Top Cover (15mm wiring clearance).
- High profile Bottom Cover (50mm wiring clearance).
- Universal card-cage slots (mixed conduction-cooled & air-cooled modules).
- Enclosure color: Navy Grey.



CM ATR CHASSIS THERMAL TESTING

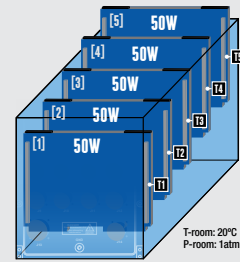





6U S Military ATR Chassis Performance

suitable for low wattage, 0.8" pitch - sealed applications

MAXIMUM MILITARY SYSTEM DELTA-T


Maximum conduction-cooled payload card-rail temperature is typically 85°C. To comply with MIL-STD-810, systems must be operational up to 55°C ambient (worst case scenario).

In theory, this restricts payload maximum ΔT to 85°C - 55°C ($\Delta T_{max} = 30^\circ C$). Temperatures in excess of 85°C dramatically increase the risk of module failure and reduce component MTBF. Military limits may be relaxed for systems serving in 'indoor environments' (e.g. to 40°C ambient). Under these conditions ΔT margin can be increased to 85°C - 40°C = 45°C ΔT_{max} .

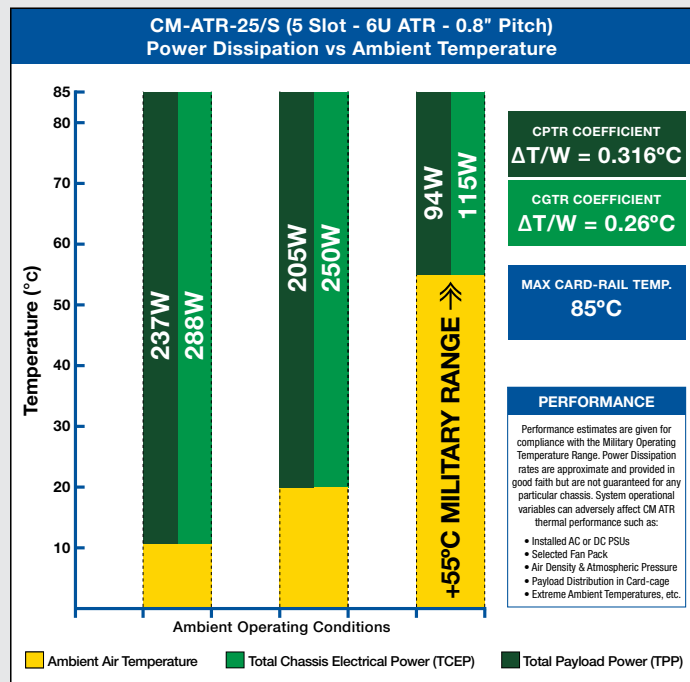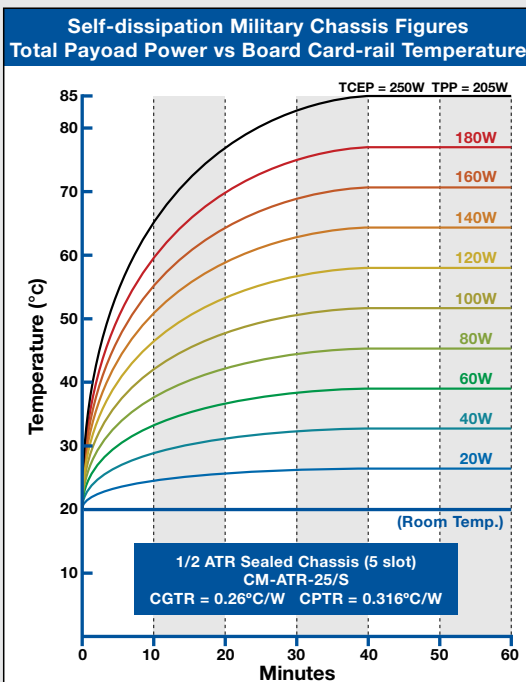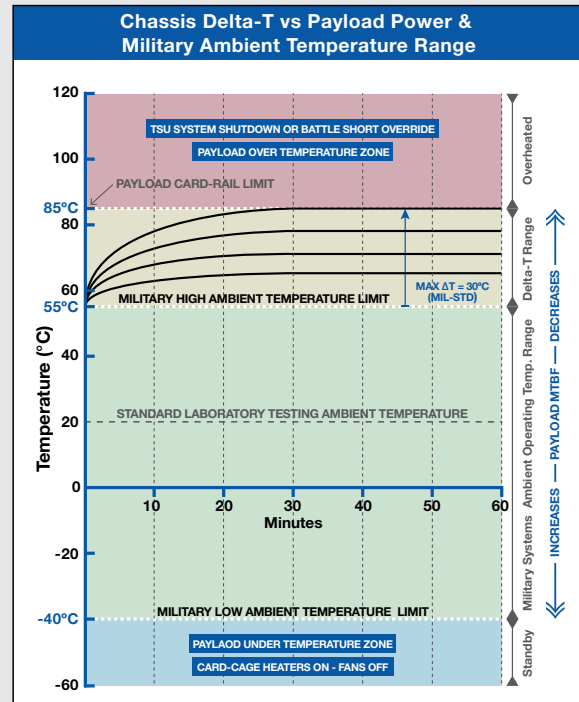







CM ATR CHASSIS THERMAL TESTING

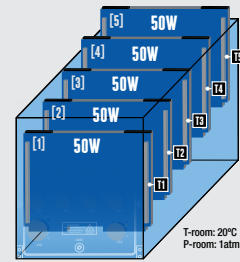

6U S Military ATR Chassis Performance

suitable for low wattage, 0.8" pitch - sealed applications

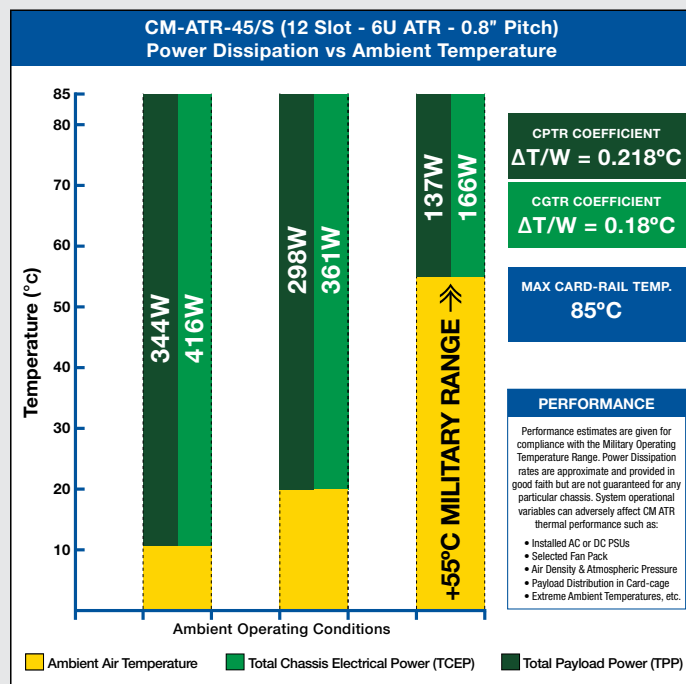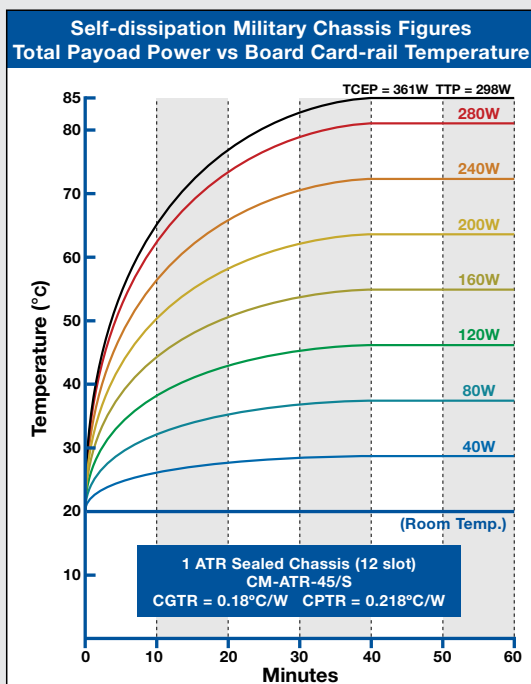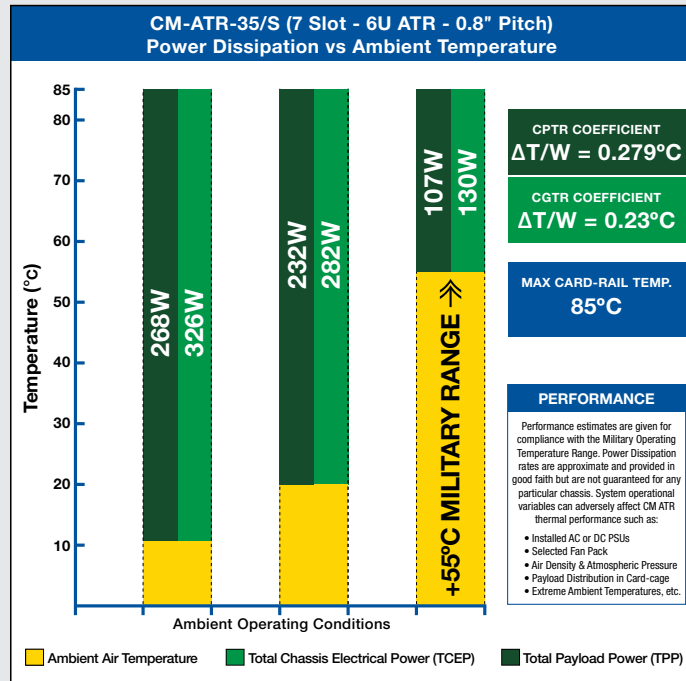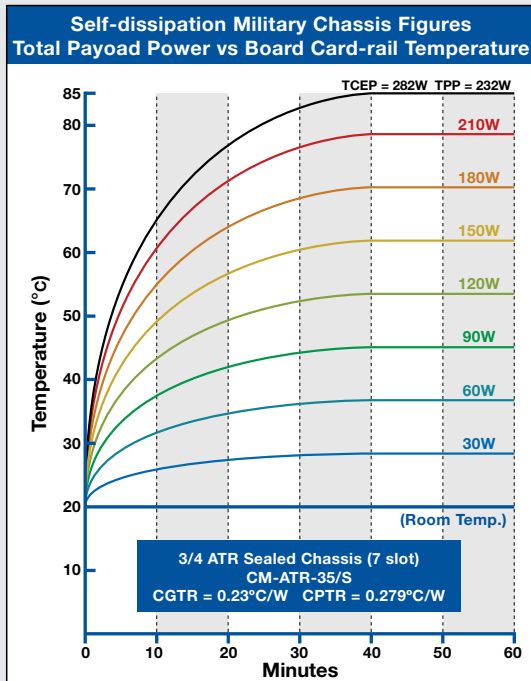



CM ATR ORDERING INFORMATION



6U Military ATR Chassis Ordering

high performance military aerospace enclosure part number configuration

CHASSIS GENERIC PART NUMBER:

CM-ATR-S5 /CT /B /I /W /3.3 /D1 /D2 /R /S /FP /TC /BC /CS /F /G /C

MOUNTING TRAY GENERIC PART NUMBER:

CM-TR-S5 /CT

/S5 COTS Enclosure Size/Model

CM-ATR-25: 5 Slot 6U Enclosure (0.8" pitch - 1/2 ATR type)
CM-ATR-125: 5 Slot 6U Enclosure (1" pitch - 1/2 ATR type)
CM-ATR-35: 7 Slot 6U Enclosure (0.8" pitch - 3/4 ATR type)
CM-ATR-135: 7 Slot 6U Enclosure (1" pitch - 3/4 ATR type)
CM-ATR-45: 12 Slot 6U Enclosure (0.8" pitch - 1 ATR type)

/CT Enclosure Cooling Technique

S: Standard Sealed (0.8" pitch)
SEF: Sealed with Extended Fins (0.8" pitch)
SEF-HP: Sealed with Extended Fins + 18/20 Heat Pipes (0.8" pitch)
HES: Sealed with 4 Heat Exchangers (0.8" and 1" pitch versions)
SIXHEX: Sealed with 6 Heat Exchangers (0.8" and 1" pitch versions)
SIXHEX-HP: Sealed with 6 Heat Exchangers and integrated Heat Pipes (0.8" pitch with 16HP and 1" pitch with 20HP versions)
FAC: Flowthrough Air Cooled Enclosure (open, non-sealed) (0.8" pitch)

/B Backplane Type (slot pitch according to chassis model)

VME64x: Military VME64x Backplane
cPCI: Military Compact PCI Backplane
VPX: VITA 46 Military VPX Backplane
VME64x/VPX: Hybrid VME64x mixed with VPX Military Backplane
VME64x/cPCI: Hybrid VME64x mixed with cPCI Military Backplane
Note: Hybrid dual bus backplanes are available for a limited set of chassis only

/I PSU Input Power Voltage

28VDC: 28 VDC Input
48VDC: 48 VDC Input
72VDC: 72 VDC Input
270VDC: 270 VDC Input
90-264VAC: Autorange 90-264 VAC @ 47-880 Hz Input
200VAC-3PH: 200 VAC 3 Phase @ 47-880 Hz Input

/W Power Supply Unit Watts

All PSUs = All PSUs except 28 VDC input | 28 VDC = 28 VDC input only

PSUs for CM-ATR-25 (5 slot)

Models: /S or /SEF or /SEF-HP or /HES (0.8") or /FAC

300W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 5A, ±12 VDC @ 8A)
400W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 5A, ±12 VDC @ 12A)

Models: /S or /SEF or /SEF-HP or /HES or /SIXHEX or /SIXHEX-HP

A-475W: 28 VDC (+5 VDC @ 40A, +3.3 VDC @ 22A, ±12 VDC @ 8A)
A-575W: All PSUs (+5 VDC @ 40A, +3.3 VDC @ 22A, ±12 VDC @ 12A)
B-450W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 45A, ±12 VDC @ 8A)
B-550W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 45A, ±12 VDC @ 12A)
C-475W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 22A, +12 VDC @ 16A, -12 VDC @ 8A)
C-575W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 22A, +12 VDC @ 21A, -12 VDC @ 12A)

PSUs for CM-ATR-(1)35 (7 slot) & CM-ATR-125 (5 Slot 1" Pitch)

Models: /S or /SEF or /SEF-HP or /HES (0.8") or /FAC

400W: 28 VDC (+5 VDC @ 40A, +3.3 VDC @ 5A, ±12 VDC @ 8A)
500W: All PSUs (+5 VDC @ 40A, +3.3 VDC @ 5A, ±12 VDC @ 12A)

Models: /S or /SEF or /SEF-HP or /HES or /SIXHEX or /SIXHEX-HP

A-475W: 28 VDC (+5 VDC @ 40A, +3.3 VDC @ 22A, ±12 VDC @ 8A)
A-575W: All PSUs (+5 VDC @ 40A, +3.3 VDC @ 22A, ±12 VDC @ 12A)
A-675W: 28 VDC (+5 VDC @ 80A, +3.3 VDC @ 22A, ±12 VDC @ 8A)
A-775W: All PSUs (+5 VDC @ 80A, +3.3 VDC @ 22A, ±12 VDC @ 12A)
B-450W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 45A, ±12 VDC @ 8A)
B-550W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 45A, ±12 VDC @ 12A)
B-564W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 80A, ±12 VDC @ 8A)
B-664W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 80A, ±12 VDC @ 12A)
C-475W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 22A, +12 VDC @ 16A, -12 VDC @ 8A)
C-575W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 22A, +12 VDC @ 21A, -12 VDC @ 12A)
C-775W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 22A, +12 VDC @ 41A, -12 VDC @ 8A)
C-825W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 22A, +12 VDC @ 41A, -12 VDC @ 12A)
D-550W: 28 VDC (+5 VDC @ 40A, +3.3 VDC @ 45A, ±12 VDC @ 8A)
D-650W: All PSUs (+5 VDC @ 40A, +3.3 VDC @ 45A, ±12 VDC @ 12A)
E-550W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 45A, +12 VDC @ 16A, -12 VDC @ 8A)
E-650W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 45A, +12 VDC @ 21A, -12 VDC @ 12A)
F-575W: 28 VDC (+5 VDC @ 40A, +3.3 VDC @ 22A, +12 VDC @ 16A, -12 VDC @ 8A)
F-675W: All PSUs (+5 VDC @ 40A, +3.3 VDC @ 22A, +12 VDC @ 21A, -12 VDC @ 12A)

Dual-redundant PSUs for /HES or /SIXHEX or /SIXHEX-HP models

R2x500W: (+5 VDC @ 25A, +3.3 VDC @ 23A, ±12 VDC @ 12A)

PSU for CM-ATR-45 (12 slot)

Models: /S or /SEF or /SEF-HP or /HES (0.8") or /FAC

950W: 28 VDC (+5 VDC @ 80A, +3.3 VDC @ 45A, ±12 VDC @ 16A)
1050W: All PSUs (+5 VDC @ 80A, +3.3 VDC @ 45A, ±12 VDC @ 21A)

Models: /HES or /SIXHEX or /SIXHEX-HP

A-950W: 28 VDC (+5 VDC @ 80A, +3.3 VDC @ 45A, ±12 VDC @ 16A)
A-1050W: All PSUs (+5 VDC @ 80A, +3.3 VDC @ 45A, ±12 VDC @ 21A)
B-950W: 28 VDC (+5 VDC @ 40A, +3.3 VDC @ 45A, +12 VDC @ 33A, -12 VDC @ 16A)
B-1100W: All PSUs (+5 VDC @ 40A, +3.3 VDC @ 45A, +12 VDC @ 41A, -12 VDC @ 20A)
B-1065W: 28 VDC (+5 VDC @ 80A, +3.3 VDC @ 80A, ±12 VDC @ 16A)
B-1165W: All PSUs (+5 VDC @ 80A, +3.3 VDC @ 80A, ±12 VDC @ 21A)
C-864W: 28 VDC (+5 VDC @ 40A, +3.3 VDC @ 80A, ±12 VDC @ 16A)
C-964W: All PSUs (+5 VDC @ 40A, +3.3 VDC @ 80A, ±12 VDC @ 20A)
C-1225W: 28 VDC (+5 VDC @ 80A, +3.3 VDC @ 160A, ±12 VDC @ 16A)
C-1425W: All PSUs (+5 VDC @ 80A, +3.3 VDC @ 160A, ±12 VDC @ 21A)
D-1350W: 28 VDC (+5 VDC @ 160A, +3.3 VDC @ 80A, ±12 VDC @ 16A)
D-1550W: All PSUs (+5 VDC @ 160A, +3.3 VDC @ 80A, ±12 VDC @ 21A)

Dual-redundant PSUs for /HES or /SIXHEX or /SIXHEX-HP models

R2x725W: (+5 VDC @ 20A, +3.3 VDC @ 23A, ±12 VDC @ 12A, ±28 VDC @ 9A)
R2x675W: (+5 VDC @ 60A, +3.3 VDC @ 23A, ±12 VDC @ 12A)
R2x625W: (+5 VDC @ 20A, +3.3 VDC @ 68A, ±12 VDC @ 12A)
R2x710W: (+5 VDC @ 20A, +3.3 VDC @ 23A, +12 VDC @ 32A, -12 VDC @ 12A)



/3.3 DC/DC AUX0 fitted for 3.3VDC (CM-ATR-25 & CM-ATR-35)

3.3-75W: 3.3VDC @ 22A (in lieu of default 3.3 VDC @ 5A)
Optional DC/DC AUX0 converter on Backplane fitted for 3.3VDC. Option suited for 1st generation PSU models 300W/400W/500W. Note: If /3.3-75W is not selected, DC/DC power socket AUX0 remains free to the user.

/D1 DC/DC AUX1 (CM-ATR-35 & CM-ATR-45) /D2 DC/DC AUX2 (CM-ATR-45)

D1: 100W Optional DC/DC Converter on Backplane. User-defined output 1
D2: 100W Optional DC/DC Converter on Backplane. User-defined output 2
Backplane auxiliary DC/DC converter output options: +2VDC 50W, -2VDC 50W, +3.3VDC 75W, -3.3VDC 75W, +5VDC 100W, -5VDC 100W, +12VDC 100W, -12VDC 100W, +15VDC 100W, -15VDC 100W, +28VDC 100W, -28VDC 100W, +48VDC 100W, -48VDC 100W.
Ordering Examples: 48-100W » 48VDC @ 2A / -5-100W » -5VDC @ 20A / 2-50W » 2VDC @ 25A / ±15-100W » ±15VDC @ 6A

/R Redundant PSU (Plug-in for VMEbus systems only)

RPSU for CM-ATR-35 (7 slot) & CM-ATR-45 (12 slot)
RA-475W: 28 VDC (+5 VDC @ 40A, +3.3 VDC @ 22A, ±12 VDC @ 8A)
RB-575W: All PSUs (+5 VDC @ 40A, +3.3 VDC @ 22A, ±12 VDC @ 12A)

/S Temperature Supervisory Unit

TSU: Optionally installed in backplane (for /S or /SEF or /FAC models)
Note: TSU is fitted as standard in /SEF-HP, /HES, /SIXHEX & /SIXHEX-HP models

/FP Front Panel Layout

CMP: Standard CM front panel fitted with MIL-DTL-38999 connectors
UDP: User-defined front panel layout (requires customer drawing)

/TC Chassis Top Cover

STC: Standard top cover (wiring clearance 20mm)
FTC: Finned top cover (wiring clearance 20mm)*
HTC: High profile top cover (wiring clearance 35mm)
HETC: Heat Exchanger top cover (wiring clearance 20mm)**
EHETC: Extended Heat Exchanger top cover (wiring clearance 35mm)
 * *FTC chassis top cover is standard on /SEF & /SEF-HP models*
 ** *HETC chassis top cover is standard on /HES, /SIXHEX & /SIXHEX-HP models*

/BC Chassis Bottom Cover

SBC: Standard bottom cover (wiring clearance below backplane 25mm)
HBC: High profile bottom cover (wiring clearance below backplane 50mm)*
 * *50mm bottom clearance is standard on /HES-1", /SIXHEX & /SIXHEX-HP models*

/CS Chassis Card-Cage Slot

MCS: Mixed Card-cage slots (mixed conduction-cooled & air-cooled boards)
CCS: Conduction-cooled Card-cage slots (conduction-cooled boards only)*
 * *CCS card-cage is standard on /HES-1", /SIXHEX-1" & /SIXHEX-HP-1" models*

/F Rear-Mounted Fan Assembly

Fans for CM-ATR-(1)25 (5 slot) & CM-ATR-(1)35 (7 slot)

Models: /FAC

F115-400: 1x65 CFM 115 VAC @ 400Hz Rotron PX2 Military fan
F200-400: 1x120 CFM 200 VAC 3PH @ 400Hz Rotron PX2 fan
F28: 1x65 CFM 28 VDC Rotron PX2 Military fan (through DC/AC converter)

Models: /HES (0.8")

F115-400: 2x65 CFM 115 VAC @ 400Hz Rotron PX2 Military fans
F200-400: 2x120 CFM 200 VAC 3PH @ 400Hz Rotron PX2 fans
F28: 2x65 CFM 28 VDC Rotron PX2 Military fans (through DC/AC converter)

Models: /HES (1") /SIXHEX or /SIXHEX-HP

F115-400: 2x100 CFM 115 VAC @ 400Hz Rotron PX3 Military fans
F200-400: 2x140 CFM 200 VAC 3PH @ 400Hz Rotron PX3 fans
F28: 2x100 CFM 28 VDC Rotron PX3 Military fans
F115-60: 2x100 CFM 115 VAC @ 60Hz Rugged fans
F220-50: 2x100 CFM 220 VAC @ 50Hz Rugged fans

Fans for CM-ATR-45 (12 slot)

Models: /FAC

F115-400: 2x100 CFM 115 VAC @ 400Hz Rotron PX3 Military fans
F200-400: 2x140 CFM 200 VAC 3PH @ 400Hz Rotron PX3 fans
F28: 2x100 CFM 28 VDC Rotron PX3 Military fans

Models: /HES

F115-400: 4x65 CFM 115 VAC @ 400Hz Rotron PX2 Military fans
F200-400: 4x120 CFM 200 VAC 3PH @ 400Hz Rotron PX2 fans
F28: 4x65 CFM 28 VDC Rotron PX2 Military fans (through DC/AC converter)

Models: /SIXHEX or /SIXHEX-HP

F115-400: 4x100 CFM 115 VAC @ 400Hz Rotron PX3 Military fans
F200-400: 4x140 CFM 200 VAC 3PH @ 400Hz Rotron PX3 fans
F28: 4x100 CFM 28 VDC Rotron PX3 Military fans
F115-60: 4x100 CFM 115 VAC @ 60Hz Rugged fans
F220-50: 4x100 CFM 220 VAC @ 50Hz Rugged fans

VAP: Vehicle Air-Plenum according to system specs (external forced air source)

- *No rear fan required for /S, /SEF & /SEF-HP models, omit option from part number*
- *Rugged fans are fitted with aluminum housing. Operating range: -10°C to +70°C*
- *Full military Rotron PX2 & PX3 AC fans. Operating range: -54°C to +125°C*
- *Note: Fan input voltage can be selected independently of main PSU voltage*

/G Fan Finger Guards

STDG: Standard Rotron PX2/PX3 finger guards
EMIG: Optional EMI shielding finger guards with honeycomb filter
GNF: Optional finger guards with acoustic noise filter (-5dB)

/C Chassis Color

B: Black, **G:** Navy Grey, **E:** Army Dark Earth, **W:** White, **R:** Red, **PT:** Platinum, **YW:** Yellow, **GN:** Green, **BLU:** Dark Blue, **CR:** Chromate, **O:** Other (user-defined)

PART NUMBER EXAMPLE:


CM-ATR-45/HES/VME64x/90-264VAC/A-1050W/15-100W/-15-100W/UDP/HTC/HBC/MCS/F200-400/EMIG/B

- 12 slot, Heat Exchanger Sidewalls. 6U Avionics Enclosure.
- 12 slot VME64x backplane for 6U boards (0.8" pitch).
- Auto-range 90-264VAC @ 47-880Hz Input Power Supply.
- A-1050W power supply (+5VDC @ 80A, +3.3VDC @ 45A, ±12VDC @ 21A).
- (±)15VDC @ 6.6A DC/DC AUX1 & AUX2 user output on backplane.
- Temperature Supervisory Unit fitted as standard.
- User-defined front panel layout.
- High profile Top & Bottom cover. Universal Card-cage Slots.
- 4x Rotron PX2 military fan 115VAC @ 400Hz (260 CFM total).
- EMI shielded finger guards. Enclosure color: Black.



CM ATR CHASSIS THERMAL TESTING

CM ATR Chassis Selection Chart based on system total payload power dissipation

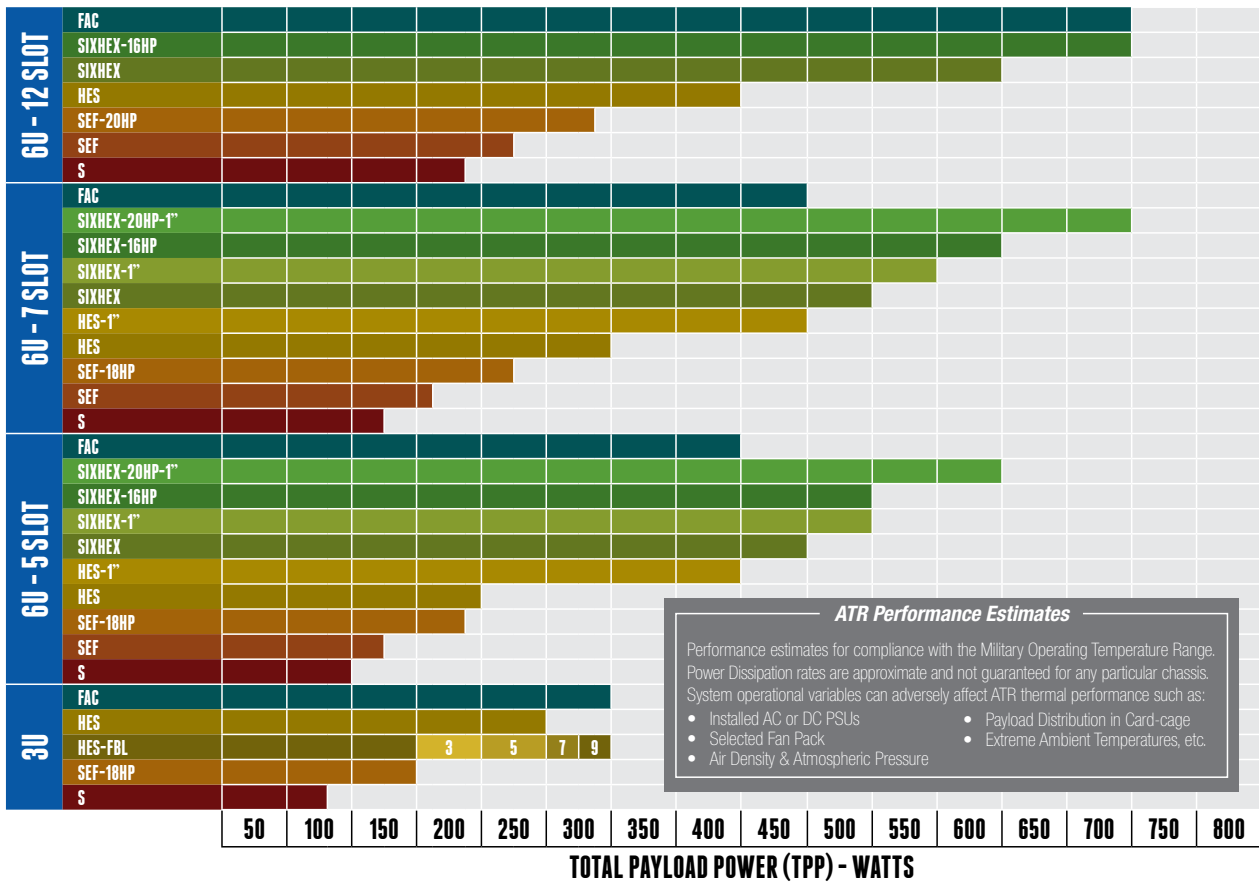

ATR Performance Estimates

Performance estimates for compliance with the Military Operating Temperature Range. Power Dissipation rates are approximate and not guaranteed for any particular chassis. System operational variables can adversely affect ATR thermal performance such as:

- Installed AC or DC PSUs
- Selected Fan Pack
- Air Density & Atmospheric Pressure
- Payload Distribution in Card-cage
- Extreme Ambient Temperatures, etc.

Glossary of Technical Terms establishing new chassis engineering terminology

- LT : Chassis Linear Thermal Test (Linear Test)
- PT : Chassis Peak Slot Thermal Test (Peak Test)
- MT : Chassis Mixed Linear & Peak Slot Thermal Test (Mixed Test)
- LT-AV : Linear Test Payload Average Temperature
- PT-AV : Peak Test Payload Average Temperature
- MT-T1 : Mixed Test Slot 1 Payload Temperature
- MT-AV : Mixed Test Payload Average Temperature (excluding Slot 1)
- ΔT : Chassis Payload Delta-T with respect to Ambient Temperature
- TPP : Total Payload Power
- TCEP : Total Chassis Electrical Power
- CPTR : Chassis Payload Thermal Resistance
- CGTR : Chassis Global Thermal Resistance

- CHMPF : Chassis Half MTBF Power Factor
- CPMDC : Chassis Payload MTBF Degradation Coefficient
- CIA : Chassis Installed Airflow
- CEA : Chassis Effective Airflow
- ADDT : Ambient Airflow Delta-T
- CSAOP : Chassis Stable Airflow Operating Point
- CIARC : Chassis Impedance Airflow Reduction Coefficient
- MFARC : Multiple Fan Airflow Reduction Coefficient
- OARC : Overall Airflow Reduction Coefficient
- SCIDPC : Sealed Chassis Indirect Delta-T Power Coefficient
- PEADT : Payload to Exhaust Airflow Delta-T
- CCAAT : Chassis Cooling Airflow Average Temperature