
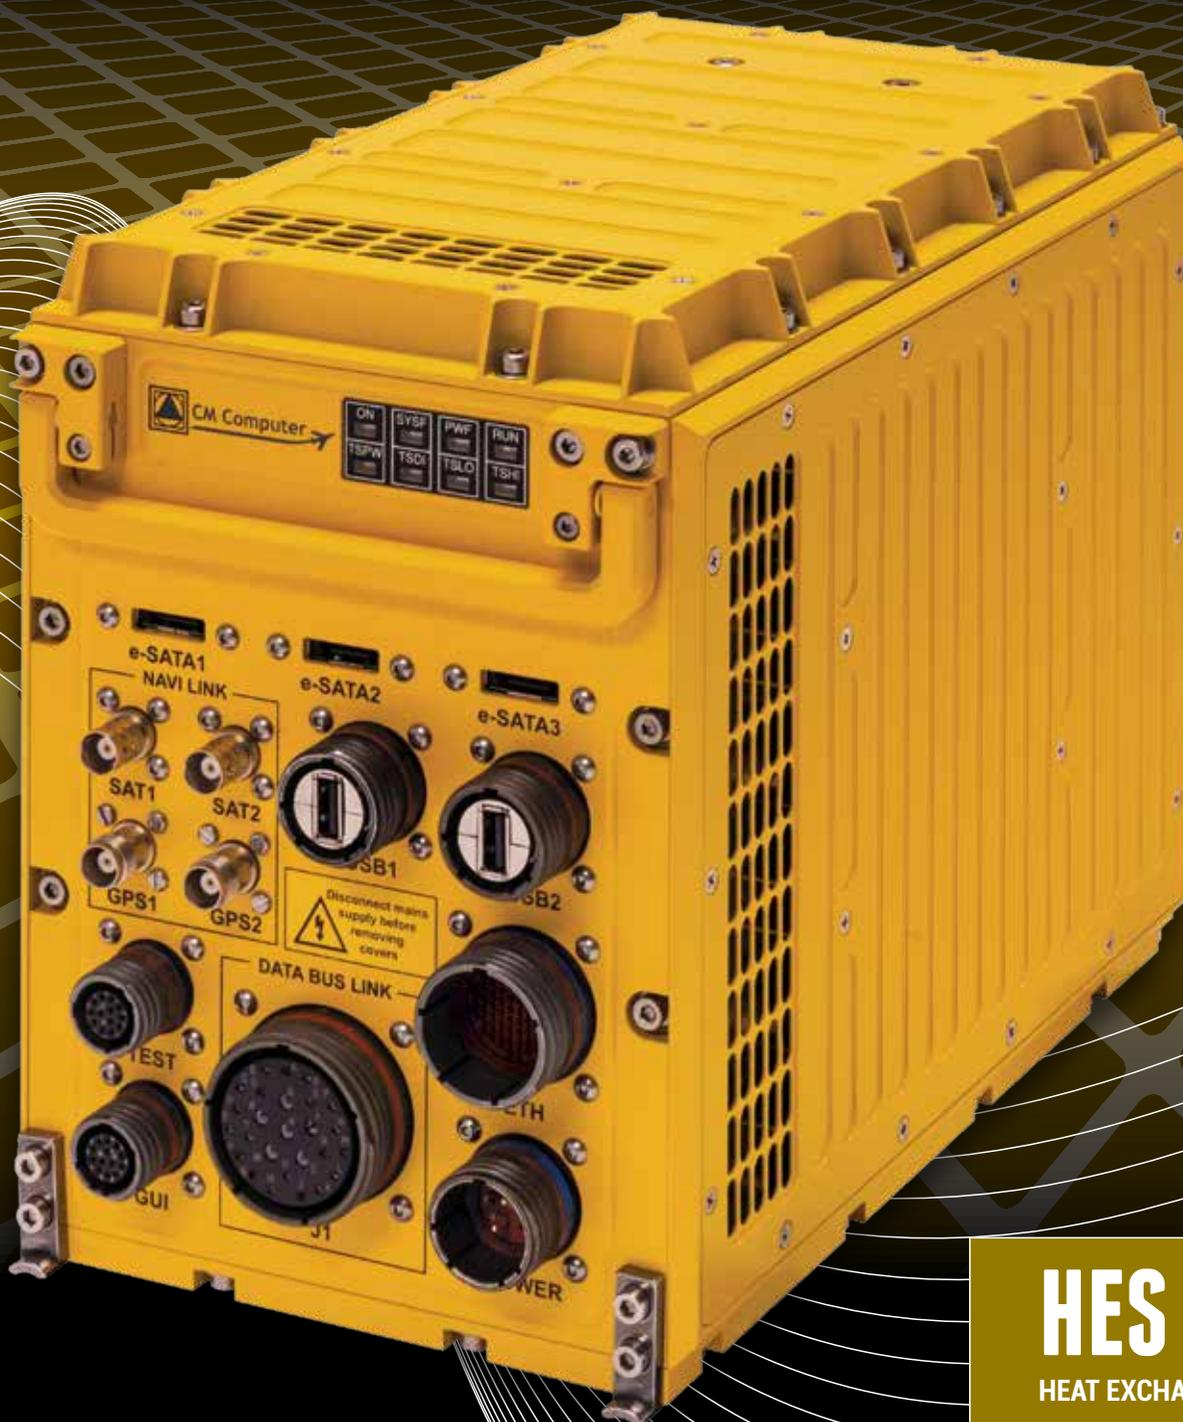


SEALED FOUR HEAT EXCHANGER 3U ATR ENCLOSURE

- » Best thermal performance 3U chassis on the COTS market
- » Forced-air heat exchanger sidewalls, top cover & rear panel
- » Dry air contaminant-free SWaP applications
- » 5 slot conduction and air-cooled 1" pitch modules
- » 6 slot conduction-cooled 0.85" pitch VPX version available
- » Standard rugged or high airflow military PX2 rear fans
- » Oversized output capacity military power supply options
- » Up to 250 watts payload power dissipation*
- » Internal forced-air recirculation

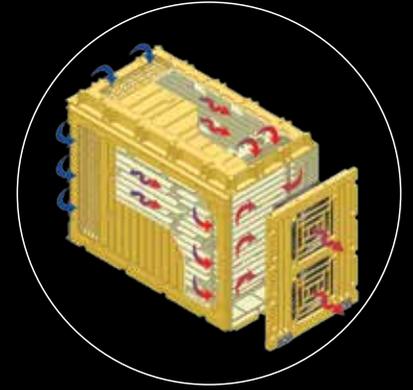

HES

HEAT EXCHANGER SIDEWALLS

↑ 250W
PAYLOAD POWER DISSIPATION



HEAT EXCHANGER SIDEWALLS 3U ATR



Heat Exchanger Sidewalls 3U ATR - Contaminant-free Enclosure suitable for high wattage VME, VPX & cPCI applications with 0.8, 0.85 & 1" pitch 3U eurocards

Our highest performance 3U *Four Heat Exchanger* sealed enclosure has been designed for compact aerospace and UAV applications that require state-of-the-art power dissipation technology. This low maintenance chassis is ideal for advanced SWaP military systems operating where ambient air is laden with hostile or harmful contaminants.

AVAILABILITY

The 3U CM Heat Exchanger Sidewalls ATR is available in a 5 slot 1" or 6 slot 0.85" pitch versions. This chassis fits our 3U military VME, cPCI or VPX compact backplanes and CM's most integrated Power Supply Units (up to 825 watts).

CHASSIS COOLING & COLD PLATE MOUNTING

Two rugged or military PX2 rear fans force air through the integrated heat exchangers. Internal dry air recirculation ensures homogeneous hot-spot cooling. Chassis can be optionally cold plate mounted to increase dissipation by approximately 10%.

CM-ATR-3U/HES Specifications

DIMENSIONS	W 163 mm H 215 mm D 290 mm	SLOTS	5 or 6
WEIGHT	5.6 Kg	FRONT PANEL AREA	125 mm x 140 mm
CGTR THERMAL RES.	$\Delta T/W = 0.11^\circ\text{C}$ (CIA = 130 CFM)	CM FRONT PANEL	6 Power Pins (13 Amp) & 382 I/O Pins (5 Amp)
INTERNAL FAN	54 CFM	TEMPERATURE SPEC	-40°C to 85°C Op., -55°C to 100°C Stg.
REAR FAN	120 CFM (Rugged) or 130/240 CFM (PX2)	MTBF	25° GB 82,000 Hours, 65° AIC 27,000 Hours
PSU POWER	450 to 825 watts	MOUNTING TRAY	CM-TR-3U/HES
STD BACKPLANE	VME64X or cPCI or VPX 5 slot 1" pitch 3U backplanes (0.85" 6 slot VPX also available)		
PSU V-INPUT	28 VDC $\pm 30\%$, 48 VDC $\pm 30\%$, 72 VDC $\pm 30\%$, 270 VDC $\pm 30\%$, Autorange 90-132 VAC RMS & 180-264 VAC RMS @ 47-880 Hz, 3-Phase 200 VAC @ 47-880 Hz $\pm 30\%$		
SLOT/BOARD FORMAT	CCS: Conduction-cooled slots only or MCS: Slot-by-slot user configured card-cage allows intermixing conduction-cooled ANSI-VITA 48.2 & air-cooled ANSI-VITA 48.1 boards		

COMPLEMENTARY INFORMATION

- CM ATR Common Features
- CM ATR Backplanes
- CM ATR Power Supplies


PART NUMBER EXAMPLE:

CM-ATR-3U/HES/VPX/28VDC/B-450W/CMP/HTC/HBC/CCS/STDF-DC/G



For ordering information see page last page of this datasheet.



CM ATR CHASSIS THERMAL TESTING




3U HES Military ATR Chassis Performance designed for high wattage, 1" pitch - sealed applications

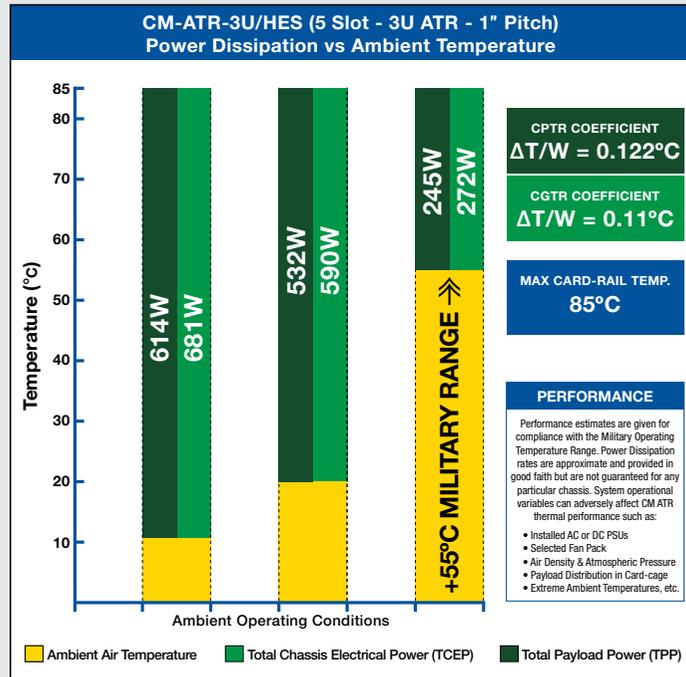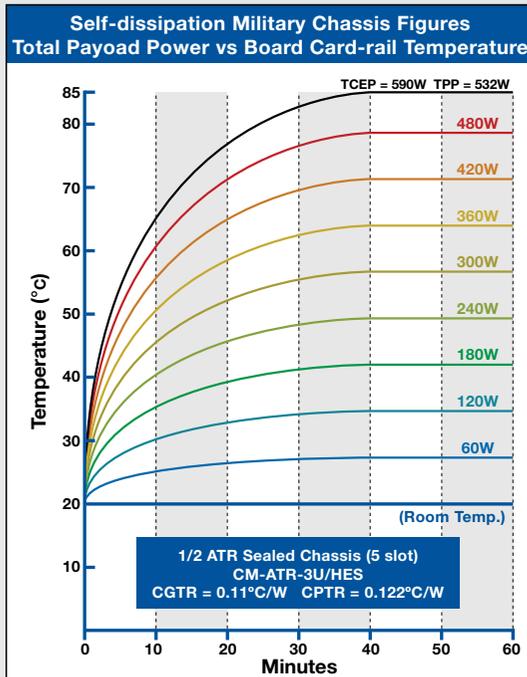

MAXIMUM MILITARY SYSTEM DELTA-T

Maximum conduction-cooled payload card-rail temperature is typically 85°C. To comply with MIL-STD-810, systems must be operational up to 55°C ambient (worst case scenario).

In theory, this restricts payload maximum ΔT to 85°C - 55°C ($\Delta T_{max} = 30^\circ\text{C}$). Temperatures in excess of 85°C dramatically increase the risk of module failure and reduce component MTBF. Military limits may be relaxed for systems serving in 'indoor environments' (e.g. to 40°C ambient). Under these conditions ΔT margin can be increased to 85°C - 40°C = 45°C ΔT_{max} .

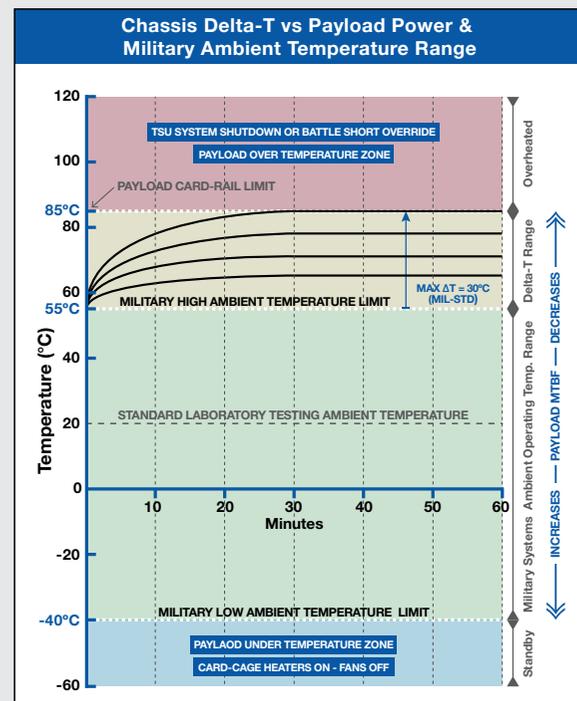



CM ATR ORDERING INFORMATION



3U Military ATR Chassis Ordering SWaP military aerospace enclosure part number configuration

Please carefully follow our chassis ordering guide for configuring your 3U ATR part number. Note that all CM 3U Backplanes integrate a functional Temperature Supervisory Unit (TSU) that controls Power Supply and Fan operation. Remote optoisolated control switches for 'Battle-short' and chassis PSU 'on/standby' are also fitted as standard.

CHASSIS GENERIC PART NUMBER:

CM-ATR-3U /CT /B /I /W /FP /TC /BC /CS /F /C

MOUNTING TRAY GENERIC PART NUMBER:

CM-TR-3U /CT

/CT Enclosure Cooling Technique

S: Standard Sealed 3U Enclosure
SEF-18HP: Sealed with Extended Fins + 18 Heat Pipes 3U Enclosure
HES: Sealed with Heat Exchangers 3U Enclosure
HES-FBL(3-5-7-9): Sealed with Heat Exchangers 3U Enclosure
HES-FBL(3-5-7-9)-HP: Sealed with Heat Exchangers + Heat Pipes 3U Enclosure
FAC: Flowthrough Air Cooled 3U Enclosure (open, non-sealed)

/B Backplane Type

VME64x: Military VME64x Backplane (5 Slot 3U 1" Pitch)
cPCI-S: Military Compact PCI Serial R.2.0 Backplane (3-5-7-9 Slot 3U 1" Pitch)
VPX: VITA 46 Military VPX Backplane (3-5-7-9 Slot 3U 1" Pitch)
VPX-6: VITA 46 Military VPX Backplane (6 Slot 3U 0.85" Pitch)

/I PSU Input Power Voltage

28VDC: 28 VDC Input
48VDC: 48 VDC Input
72VDC: 72 VDC Input
270VDC: 270 VDC Input
90-264VAC: Autorange 90-264 VAC @ 47-880 Hz Input
200VAC-3Ph: 200 VAC 3 Phase @ 47-880 Hz Input

/W Power Supply Unit Watts

A-475W: 28 VDC (+5 VDC @ 40A, +3.3 VDC @ 22A, ±12 VDC @ 8A)
A-575W: All PSUs (+5 VDC @ 40A, +3.3 VDC @ 22A, ±12 VDC @ 12A)
A-675W: 28 VDC (+5 VDC @ 80A, +3.3 VDC @ 22A, ±12 VDC @ 8A)*
A-775W: All PSUs (+5 VDC @ 80A, +3.3 VDC @ 22A, ±12 VDC @ 12A)*
B-450W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 45A, ±12 VDC @ 8A)
B-550W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 45A, ±12 VDC @ 12A)
B-564W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 80A, ±12 VDC @ 8A)*
B-664W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 80A, ±12 VDC @ 12A)*
C-475W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 22A, +12 VDC @ 16A, -12 VDC @ 8A)
C-575W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 22A, +12 VDC @ 21A, -12 VDC @ 12A)
C-775W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 22A, +12 VDC @ 41A, -12 VDC @ 8A)*
C-825W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 22A, +12 VDC @ 41A, -12 VDC @ 12A)*
D-550W: 28 VDC (+5 VDC @ 40A, +3.3 VDC @ 45A, ±12 VDC @ 8A)*
D-650W: All PSUs (+5 VDC @ 40A, +3.3 VDC @ 45A, ±12 VDC @ 12A)*
E-550W: 28 VDC (+5 VDC @ 20A, +3.3 VDC @ 45A, +12 VDC @ 16A, -12 VDC @ 8A)*
E-650W: All PSUs (+5 VDC @ 20A, +3.3 VDC @ 45A, +12 VDC @ 21A, -12 VDC @ 12A)*
F-575W: 28 VDC (+5 VDC @ 40A, +3.3 VDC @ 22A, +12 VDC @ 16A, -12 VDC @ 8A)*
F-675W: All PSUs (+5 VDC @ 40A, +3.3 VDC @ 22A, +12 VDC @ 21A, -12 VDC @ 12A)*
All PSUs = All PSUs except 28 VDC input | 28 VDC = 28 VDC input only
*PSU not available for CM-ATR-3U/FAC & CM-ATR-3U/HES-FBL chassis models

/FP Front Panel Layout

CMP: Standard CM front panel fitted with MIL-DTL-38999 connectors
UDP: User-defined front panel layout (requires customer drawing)

/TC Chassis Top Cover

STC: Standard Top Cover. Wiring clearance 13mm
FTC: Standard Top Cover. Wiring clearance 13mm. (Std. on SEF-18HP)
HTC: High profile Top Cover. Wiring clearance 35mm
HETC: Heat Exchanger Top Cover. Wiring clearance 13mm (Std. on HES & HES-FBL)

/BC Chassis Bottom Cover

SBC: Standard Bottom Cover. Wiring clearance below backplane 25mm
HBC: High profile Bottom Cover. Wiring clearance below backplane 40mm

/CS Chassis Card-Cage Slot

MCS: Mixed Card-cage Slots (mixed conduction-cooled & air-cooled boards)
CCS: Conduction-cooled Card-cage Slots (conduction-cooled boards only)
- MCS is not available for CM-ATR-3U/HES-FBL chassis models

/F Rear-Mounted Fan Assembly

STDF: 2x60 CFM DC Rugged fans (HES, HES-FBL & HES-FBL-HP) or 1x60 CFM DC Rugged fan (FAC)
F115-400: 2x65 CFM 115 VAC @ 400Hz Rotron PX2 Military fans (HES-FBL, HES & HES-FBL-HP) or 1x65 CFM Rotron PX2 Military fan (FAC)
F200-400: 2x120 CFM 200 VAC 3PH @ 400Hz Rotron PX2 fans (HES-FBL, HES & HES-FBL-HP) or 1x120 CFM Rotron PX2 Military fan (FAC)
- No rear fan required for CM-ATR-3U/S & /SEF-HP, omit option from part number.
- Rugged fans are fitted with aluminum housing. Operating range: -10°C to +70°C
- Full military Rotron PX2 AC fans. Operating range: -54°C to +125°C

/C Chassis Color

B: Black, **G:** Navy Grey, **E:** Army Dark Earth, **W:** White, **R:** Red, **PT:** Platinum, **YW:** Yellow, **GN:** Green, **BLU:** Dark Blue, **CR:** Chromate MIL-C-5541 or **O:** Other

PART NUMBER EXAMPLE:


CM-ATR-3U/SEF-18HP/VPX/28VDC/A-475W/UDP/FTC/SBC/CCS/E

- 5 slot, Sealed with Extended Fins + 18 Heat Pipes 3U Avionics Enclosure.
- 5 slot, 3U VPX 1" Pitch backplane. 28VDC input power supply.
- A-475W power supply (+5 VDC @ 40A, +3.3 VDC @ 22A, ±12 VDC @ 8A).
- User-defined front panel layout (requires drawing).
- Finned Top Cover (±13mm). Standard Bottom Cover (backplane ±25mm).
- Conduction-cooled Card-cage Slots (conduction-cooled boards only).
- Enclosure color: Army Dark Earth.



CM ATR CHASSIS THERMAL TESTING

CM ATR Chassis Selection Chart based on system total payload power dissipation

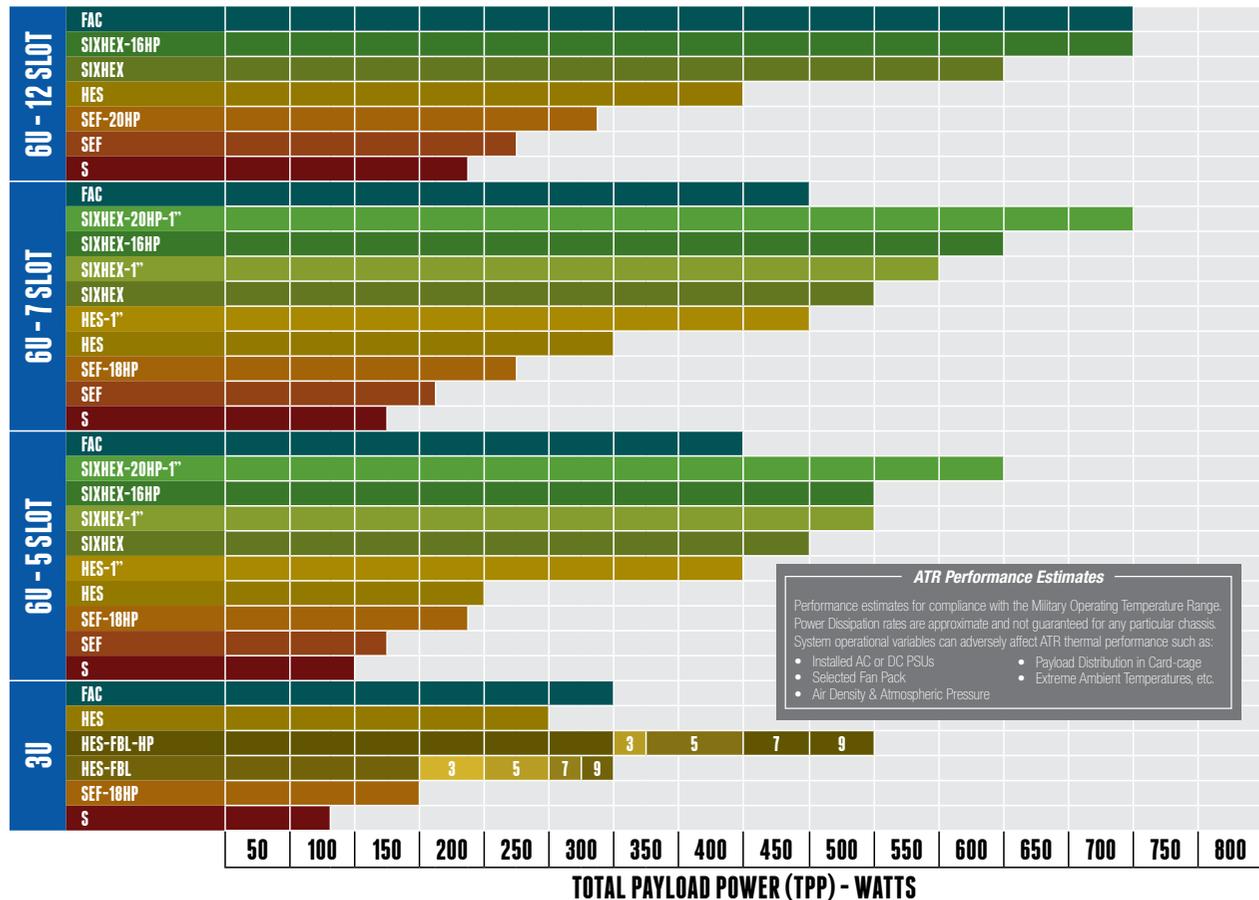

Glossary of Technical Terms establishing new chassis engineering terminology

- | | |
|---|--|
| LT : Chassis Linear Thermal Test (Linear Test) | CHMPF : Chassis Half MTBF Power Factor |
| PT : Chassis Peak Slot Thermal Test (Peak Test) | CPMDC : Chassis Payload MTBF Degradation Coefficient |
| MT : Chassis Mixed Linear & Peak Slot Thermal Test (Mixed Test) | CIA : Chassis Installed Airflow |
| LT-AV : Linear Test Payload Average Temperature | CEA : Chassis Effective Airflow |
| PT-AV : Peak Test Payload Average Temperature | ADDT : Ambient Airflow Delta-T |
| MT-T1 : Mixed Test Slot 1 Payload Temperature | CSAOP : Chassis Stable Airflow Operating Point |
| MT-AV : Mixed Test Payload Average Temperature (excluding Slot 1) | CIARC : Chassis Impedance Airflow Reduction Coefficient |
| ΔT : Chassis Payload Delta-T with respect to Ambient Temperature | MFARC : Multiple Fan Airflow Reduction Coefficient |
| TPP : Total Payload Power | OARC : Overall Airflow Reduction Coefficient |
| TCEP : Total Chassis Electrical Power | SCIDPC : Sealed Chassis Indirect Delta-T Power Coefficient |
| CPTR : Chassis Payload Thermal Resistance | PEADT : Payload to Exhaust Airflow Delta-T |
| CGTR : Chassis Global Thermal Resistance | CCAAT : Chassis Cooling Airflow Average Temperature |